

**A sturdy baseboard that can be recessed**

The **CBF** commercial baseboard heater is the suitable choice for commercial buildings, passageways and any other public establishment where wall space is precious and a recessed installation is the ideal.

Surface mountable as well, this heater looks great on its own or installed one after the other in a continuous fashion around the perimeters of a room or corridor.



**{features}**

<b>color</b>	<ul style="list-style-type: none"> <li>white (W) or almond (A)</li> <li>other colors available on request</li> </ul>
<b>finish</b>	epoxy-polyester powdercoat
<b>manufacturing</b>	<ul style="list-style-type: none"> <li>18-gauge steel cabinet</li> <li>16-gauge steel front panel</li> <li>thermal protection with automatic reset</li> <li>full-length wireway (double wireway available upon request)</li> </ul>
<b>wattage &amp; voltage</b>	see the selection table
<b>element</b>	<ul style="list-style-type: none"> <li>single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation</li> <li>securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises</li> </ul>
<b>control</b>	<ul style="list-style-type: none"> <li>built-in tamper-proof thermostat accessible without removing front grille - optional (not included)</li> <li>low voltage relay kit - optional (not included)</li> </ul>
<b>installation</b>	<ul style="list-style-type: none"> <li>surface-mounted or wall recessed</li> <li>wall or floor mounted with a pedestal kit - optional (not included)</li> <li>wiring compartments at both ends of unit (blank sections and fillers available for a continuous effect) - optional (not included)</li> </ul>
<b>warranty</b>	<ul style="list-style-type: none"> <li>10 years (element)</li> <li>1 year (unit)</li> </ul>

**{accessories}**

code	description
<b>CBFT12*</b>	built-in tamper-proof single pole thermostat
<b>CBFT22*</b>	built-in tamper-proof double pole thermostat
<b>CBFRE153*</b>	built-in electronic low voltage relay [15 A @ 120, 208, 277 or 347 V]
<b>CBFRE156*</b>	built-in electronic low voltage relay [6 A @ 600 V]
<b>CBFRE153T*</b>	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208, 277 or 347 V]
<b>CBFR841C1151*</b>	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]
<b>PK2*</b>	pedestal kit (kit of two)
<b>CBFJS*</b>	joiner strip (2 in.)
<b>CBFIC90*</b>	inside corner (back measures 5 7/8 in. long on each side)
<b>CBFOC90*</b>	outside corner (back measures 5 7/8 in. long on each side)
<b>CBFTB*</b>	4-piece trim frame
<b>CBFCB**</b>	clean back (fully finished, no mounting holes or knockouts)


electronic relays can receive a pulsed or on/off signal

\* add **W** for white or **A** for almond

\* factory installed

\* factory installation is strongly recommended

**{technical drawing}**

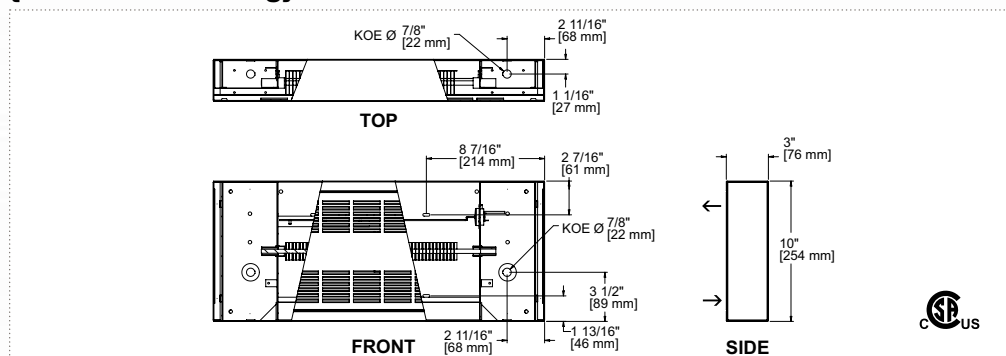

pages 90 to 96  
wall thermostats & accessories



{selection table}

250 W density per linear foot		200 W density per linear foot		150 W density per linear foot		voltage	width		weight	
code	watts	code	watts	code	watts		volts	mm	in.	kg
CBF6051	500	CBF6041	400	CBF6031	300	120	600	23 5/8	6.4	14
CBF6058	500	CBF6048	400	CBF6038	300	208	600	23 5/8	6.4	14
CBF6052	500	CBF6042	400	CBF6032	300	240	600	23 5/8	6.4	14
CBF6057	500	---	400	---	300	277	600	23 5/8	6.4	14
CBF6053	500	---	400	---	300	347	600	23 5/8	6.4	14
---	500	---	400	---	300	480	600	23 5/8	6.4	14
---	500	---	400	---	300	600	600	23 5/8	6.4	14
CBF9071	750	CBF9061	600	CBF9041	450	120	900	35 7/16	9.1	20
CBF9078	750	CBF9068	600	CBF9048	450	208	900	35 7/16	9.1	20
CBF9072	750	CBF9062	600	CBF9042	450	240	900	35 7/16	9.1	20
CBF9077	750	CBF9067	600	CBF9047	450	277	900	35 7/16	9.1	20
CBF9073	750	CBF9063	600	CBF9043	450	347	900	35 7/16	9.1	20
CBF9075	750	---	600	---	450	480	900	35 7/16	9.1	20
CBF9076	750	---	600	---	450	600	900	35 7/16	9.1	20
CBF12101	1000	CBF12081	800	CBF12061	600	120	1200	47 1/4	13.6	30
CBF12108	1000	CBF12088	800	CBF12068	600	208	1200	47 1/4	13.6	30
CBF12102	1000	CBF12082	800	CBF12062	600	240	1200	47 1/4	13.6	30
CBF12107	1000	CBF12087	800	CBF12067	600	277	1200	47 1/4	13.6	30
CBF12103	1000	CBF12083	800	CBF12063	600	347	1200	47 1/4	13.6	30
CBF12105	1000	CBF12085	800	---	600	480	1200	47 1/4	13.6	30
CBF12106	1000	CBF12086	800	---	600	600	1200	47 1/4	13.6	30
CBF15121	1250	CBF15101	1000	CBF15071	750	120	1500	59 1/16	16.8	37
CBF15128	1250	CBF15108	1000	CBF15078	750	208	1500	59 1/16	16.8	37
CBF15122	1250	CBF15102	1000	CBF15072	750	240	1500	59 1/16	16.8	37
CBF15127	1250	CBF15107	1000	CBF15077	750	277	1500	59 1/16	16.8	37
CBF15123	1250	CBF15103	1000	CBF15073	750	347	1500	59 1/16	16.8	37
CBF15125	1250	CBF15105	1000	CBF15075	750	480	1500	59 1/16	16.8	37
CBF15126	1250	CBF15106	1000	CBF15076	750	600	1500	59 1/16	16.8	37
CBF18151	1500	CBF18121	1200	CBF18091	900	120	1800	70 7/8	20.0	44
CBF18158	1500	CBF18128	1200	CBF18098	900	208	1800	70 7/8	20.0	44
CBF18152	1500	CBF18122	1200	CBF18092	900	240	1800	70 7/8	20.0	44
CBF18157	1500	CBF18127	1200	CBF18097	900	277	1800	70 7/8	20.0	44
CBF18153	1500	CBF18123	1200	CBF18093	900	347	1800	70 7/8	20.0	44
CBF18155	1500	CBF18125	1200	CBF18095	900	480	1800	70 7/8	20.0	44
CBF18156	1500	CBF18126	1200	CBF18096	900	600	1800	70 7/8	20.0	44
---	1750	CBF21141	1400	CBF21101	1050	120	2100	82 11/16	23.1	51
CBF21178	1750	CBF21148	1400	CBF21108	1050	208	2100	82 11/16	23.1	51
CBF21172	1750	CBF21142	1400	CBF21102	1050	240	2100	82 11/16	23.1	51
CBF21177	1750	CBF21147	1400	CBF21107	1050	277	2100	82 11/16	23.1	51
CBF21173	1750	CBF21143	1400	CBF21103	1050	347	2100	82 11/16	23.1	51
CBF21175	1750	CBF21145	1400	CBF21105	1050	480	2100	82 11/16	23.1	51
CBF21176	1750	CBF21146	1400	CBF21106	1050	600	2100	82 11/16	23.1	51
---	2000	---	1600	CBF24121	1200	120	2400	94 1/2	26.7	59
CBF24208	2000	CBF24168	1600	CBF24128	1200	208	2400	94 1/2	26.7	59
CBF24202	2000	CBF24162	1600	CBF24122	1200	240	2400	94 1/2	26.7	59
CBF24207	2000	CBF24167	1600	CBF24127	1200	277	2400	94 1/2	26.7	59
CBF24203	2000	CBF24163	1600	CBF24123	1200	347	2400	94 1/2	26.7	59
CBF24205	2000	CBF24165	1600	CBF24125	1200	480	2400	94 1/2	26.7	59
CBF24206	2000	CBF24166	1600	CBF24126	1200	600	2400	94 1/2	26.7	59
---	2250	---	1800	CBF27131	1350	120	2700	106 5/16	27.6	61
CBF27228	2250	CBF27188	1800	CBF27138	1350	208	2700	106 5/16	27.6	61
CBF27222	2250	CBF27182	1800	CBF27132	1350	240	2700	106 5/16	27.6	61
CBF27227	2250	CBF27187	1800	CBF27137	1350	277	2700	106 5/16	27.6	61
CBF27223	2250	CBF27183	1800	CBF27133	1350	347	2700	106 5/16	27.6	61
CBF27225	2250	CBF27185	1800	CBF27135	1350	480	2700	106 5/16	27.6	61
CBF27226	2250	CBF27186	1800	CBF27136	1350	600	2700	106 5/16	27.6	61
---	2500	---	2000	CBF27151	1500	120	2700	106 5/16	27.6	61
CBF27258	2500	CBF27208	2000	CBF27158	1500	208	2700	106 5/16	27.6	61
CBF27252	2500	CBF27202	2000	CBF27152	1500	240	2700	106 5/16	27.6	61
CBF27257	2500	CBF27207	2000	CBF27157	1500	277	2700	106 5/16	27.6	61
CBF27253	2500	CBF27203	2000	CBF27153	1500	347	2700	106 5/16	27.6	61
CBF27255	2500	CBF27205	2000	CBF27155	1500	480	2700	106 5/16	27.6	61
CBF27256	2500	CBF27206	2000	CBF27156	1500	600	2700	106 5/16	27.6	61

add W for white or A for almond.  
 --- not available

CBF