

**A touch of class**

Who says heaters can't be elegant!

One look at the **DB** draft barrier heater and you will understand that there is a new generation of electric baseboard heaters among us.

Formed with a piece of extruded aluminum, this architectural heater is built strong and with the most elegant of profiles, making it a designer's dream. Complimented by a wide array of paint and anodized finishes, excellence will no longer be compromised.

This stylish heater will blend in with any décor. It would make all your friends envious!



**{features}**


<b>color</b>	<ul style="list-style-type: none"> <li>white (W), almond (A) or clear anodized (CA)</li> <li>other colors available on request</li> </ul>
<b>finish</b>	epoxy-polyester powdercoat or clear anodized finish
<b>manufacturing</b>	<ul style="list-style-type: none"> <li>18-gauge steel cabinet</li> <li>9-gauge aluminum front panel</li> <li>front air intake and top air discharge (bottom air intake available on demand [BT])</li> <li>thermal protection with automatic reset</li> <li>full-length wireway (double wireway available upon request)</li> </ul>
<b>wattage &amp; voltage</b>	see the selection table
<b>element</b>	<ul style="list-style-type: none"> <li>single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation</li> <li>securely fastened at its center, floating in nylon sleeves at each end, eliminating expansion and contraction noises</li> </ul>
<b>control</b>	<ul style="list-style-type: none"> <li>built-in tamper-proof thermostat accessible without removing front grill - optional (not included)</li> <li>low voltage relay kit - optional (not included)</li> </ul>
<b>installation</b>	<ul style="list-style-type: none"> <li>surface mount</li> <li>wall and floor mounting with pedestals - optional (not included)</li> <li>wiring compartments at both ends of unit</li> <li>blank sections and fillers available for a continuous effect - optional (not included)</li> </ul>
<b>warranty</b>	<ul style="list-style-type: none"> <li>10 years (element)</li> <li>1 year (unit)</li> </ul>

**{accessories}**

code	description
<b>DBT12*</b>	built-in tamper-proof single pole thermostat
<b>DBT22*</b>	built-in tamper-proof double pole thermostat
<b>DBRE153*</b>	built-in electronic low voltage relay [15 A @ 120, 208, 277 or 347 V]
<b>DBRE156*</b>	built-in electronic low voltage relay [6 A @ 600 V]
<b>DBRE153T*</b>	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208, 277 or 347 V]
<b>DBR841C1151*</b>	built-in mechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]
<b>PK2*</b>	pedestal kit (kit of two)
<b>DBJS*</b>	joiner strip (2 in.)
<b>DBIC90**</b>	inside corner (back measures 5 7/8" long on each side)
<b>DBOC90**</b>	outside corner (back measures 5 7/8" long on each side)
<b>DBBT***</b>	bottom air intake/top air discharge
<b>DBCBS**</b>	clean back (fully finished, no mounting holes or knockouts)

electronic relays can receive a pulsed or on/off signal  
 \* add **W** for white, **A** for almond or **CAP** for clear anodized paint  
 \* add **CA** for clear anodized  
 \* factory installed  
 \* factory installation is strongly recommended

**{technical drawing}**

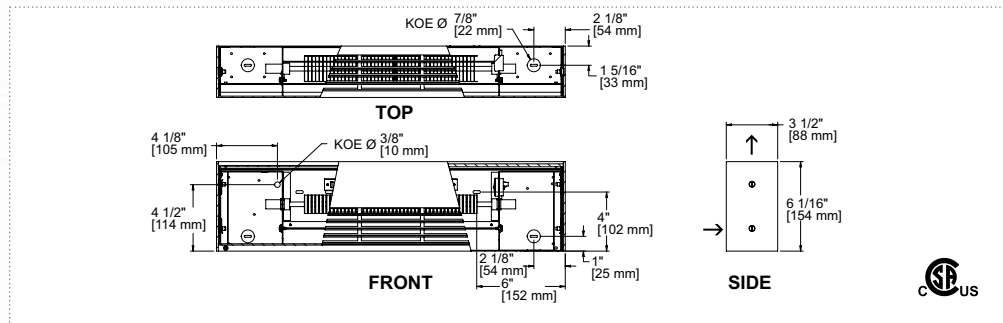

pages 90 to 96  
 wall thermostats &  
 accessories



**{selection table}**

250 W density per linear foot		200 W density per linear foot		150 W density per linear foot		voltage	width		weight	
code	watts	code	watts	code	watts		volts	mm	in.	kg
DB6051	500	DB6041	400	DB6031	300	120	600	23 5/8	3.1	6.7
DB6058	500	DB6048	400	DB6038	300	208	600	23 5/8	3.1	6.7
DB6052	500	DB6042	400	DB6032	300	240	600	23 5/8	3.1	6.7
DB6057	500	---	400	---	300	277	600	23 5/8	3.1	6.7
DB6053	500	---	400	---	300	347	600	23 5/8	3.1	6.7
---	500	---	400	---	300	480	600	23 5/8	3.1	6.7
---	500	---	400	---	300	600	600	23 5/8	3.1	6.7
DB9071	750	DB9061	600	DB9041	450	120	900	35 7/16	4.6	10.1
DB9078	750	DB9068	600	DB9048	450	208	900	35 7/16	4.6	10.1
DB9072	750	DB9062	600	DB9042	450	240	900	35 7/16	4.6	10.1
DB9077	750	DB9067	600	DB9047	450	277	900	35 7/16	4.6	10.1
DB9073	750	DB9063	600	DB9043	450	347	900	35 7/16	4.6	10.1
DB9075	750	---	600	---	450	480	900	35 7/16	4.6	10.1
DB9076	750	---	600	---	450	600	900	35 7/16	4.6	10.1
DB12101	1000	DB12081	800	DB12061	600	120	1200	47 1/4	6.8	13.4
DB12108	1000	DB12088	800	DB12068	600	208	1200	47 1/4	6.8	13.4
DB12102	1000	DB12082	800	DB12062	600	240	1200	47 1/4	6.8	13.4
DB12107	1000	DB12087	800	DB12067	600	277	1200	47 1/4	6.8	13.4
DB12103	1000	DB12083	800	DB12063	600	347	1200	47 1/4	6.8	13.4
DB12105	1000	DB12085	800	---	600	480	1200	47 1/4	6.8	13.4
DB12106	1000	DB12086	800	---	600	600	1200	47 1/4	6.8	13.4
DB15121	1250	DB15101	1000	DB15071	750	120	1500	59 1/16	7.6	16.8
DB15128	1250	DB15108	1000	DB15078	750	208	1500	59 1/16	7.6	16.8
DB15122	1250	DB15102	1000	DB15072	750	240	1500	59 1/16	7.6	16.8
DB15127	1250	DB15107	1000	DB15077	750	277	1500	59 1/16	7.6	16.8
DB15123	1250	DB15103	1000	DB15073	750	347	1500	59 1/16	7.6	16.8
DB15125	1250	DB15105	1000	DB15075	750	480	1500	59 1/16	7.6	16.8
DB15126	1250	DB15106	1000	DB15076	750	600	1500	59 1/16	7.6	16.8
DB18151	1500	DB18121	1200	DB18091	900	120	1800	70 7/8	9.1	20.1
DB18158	1500	DB18128	1200	DB18098	900	208	1800	70 7/8	9.1	20.1
DB18152	1500	DB18122	1200	DB18092	900	240	1800	70 7/8	9.1	20.1
DB18157	1500	DB18127	1200	DB18097	900	277	1800	70 7/8	9.1	20.1
DB18153	1500	DB18123	1200	DB18093	900	347	1800	70 7/8	9.1	20.1
DB18155	1500	DB18125	1200	DB18095	900	480	1800	70 7/8	9.1	20.1
DB18156	1500	DB18126	1200	DB18096	900	600	1800	70 7/8	9.1	20.1
---	1750	DB21141	1400	DB21101	1050	120	2100	82 11/16	10.6	23.4
DB21178	1750	DB21148	1400	DB21108	1050	208	2100	82 11/16	10.6	23.4
DB21172	1750	DB21142	1400	DB21102	1050	240	2100	82 11/16	10.6	23.4
DB21177	1750	DB21147	1400	DB21107	1050	277	2100	82 11/16	10.6	23.4
DB21173	1750	DB21143	1400	DB21103	1050	347	2100	82 11/16	10.6	23.4
DB21175	1750	DB21145	1400	DB21105	1050	480	2100	82 11/16	10.6	23.4
DB21176	1750	DB21146	1400	DB21106	1050	600	2100	82 11/16	10.6	23.4
---	2000	---	1600	DB24121	1200	120	2400	94 1/2	12.2	26.8
DB24208	2000	DB24168	1600	DB24128	1200	208	2400	94 1/2	12.2	26.8
DB24202	2000	DB24162	1600	DB24122	1200	240	2400	94 1/2	12.2	26.8
DB24207	2000	DB24167	1600	DB24127	1200	277	2400	94 1/2	12.2	26.8
DB24203	2000	DB24163	1600	DB24123	1200	347	2400	94 1/2	12.2	26.8
DB24205	2000	DB24165	1600	DB24125	1200	480	2400	94 1/2	12.2	26.8
DB24206	2000	DB24166	1600	DB24126	1200	600	2400	94 1/2	12.2	26.8
---	2250	---	1800	DB27131	1350	120	2700	106 5/16	13.6	30.1
DB27228	2250	DB27188	1800	DB27138	1350	208	2700	106 5/16	13.6	30.1
DB27222	2250	DB27182	1800	DB27132	1350	240	2700	106 5/16	13.6	30.1
DB27227	2250	DB27187	1800	DB27137	1350	277	2700	106 5/16	13.6	30.1
DB27223	2250	DB27183	1800	DB27133	1350	347	2700	106 5/16	13.6	30.1
DB27225	2250	DB27185	1800	DB27135	1350	480	2700	106 5/16	13.6	30.1
DB27226	2250	DB27186	1800	DB27136	1350	600	2700	106 5/16	13.6	30.1
---	2500	---	2000	DB27151	1500	120	2700	106 5/16	13.6	30.1
DB27258	2500	DB27208	2000	DB27158	1500	208	2700	106 5/16	13.6	30.1
DB27252	2500	DB27202	2000	DB27152	1500	240	2700	106 5/16	13.6	30.1
DB27257	2500	DB27207	2000	DB27157	1500	277	2700	106 5/16	13.6	30.1
DB27253	2500	DB27203	2000	DB27153	1500	347	2700	106 5/16	13.6	30.1
DB27255	2500	DB27205	2000	DB27155	1500	480	2700	106 5/16	13.6	30.1
DB27256	2500	DB27206	2000	DB27156	1500	600	2700	106 5/16	13.6	30.1

add **W** for white, **A** for almond or **CA** for clear adonized.  
 --- not available

**DB**