

RWF | PULSAIR™

WALL FAN HEATER



THE CLASSIC FAN HEATER

You won't find anything better than this efficient, durable and low noise fan heater. The Pulsair is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). It can also be mounted vertically or horizontally so that air can flow either up and down or right and left. Finally, the slim-line Pulsair can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for hallways or bathrooms, it can also be installed anywhere in the house, such as the office, or in commercial spaces. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 347 V, the Pulsair is recognized and recommended by those in the know.

VERY QUIET FAN HEATER

THE MOST RESISTANT GRILLE ON THE MARKET

INSTANT HEAT NICHROME ELEMENT

MULTIPLE INSTALLATION OPTIONS RECESSED, SURFACE MOUNTED, HORIZONTAL OR VERTICAL

ADAPTS TO MULTIPLE MARKETS AVAILABLE IN: 120 V, 208 V, 240 V AND 347 V

COLOURS

- **standard:** white, soft white
- **Orora (optional):** refer to www.stelpro.com/en-CA/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan – 40 CFM (500 W to 1000 W models) – 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset

ELEMENT

- nichrome element produces instant heat

CONTROL

- built-in thermostat (optional), 3 control knobs included (white, soft white and black)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions


WARRANTY

- five years

IDEAL FOR:

hallway, bathroom, locker room, office

FOUR INSTALLATION OPTIONS

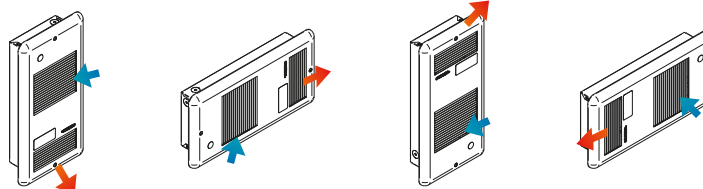

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_RWF_EN_130721

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	VOLTAGE	FLOW	THROW DISTANCE		HEAT RISE		WEIGHT	
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS	VOLTS	CFM	M	FT.	°C	°F	KG	LB
RWF0501	173.00	---	---	---	---	500	120	40	2	6'6"	30	54	2.7	6
RWF0508	171.00	---	---	---	---	500	208	40	2	6'6"	30	54	2.7	6
RWF0502	170.00	---	---	---	---	500/375	240/208	40	2	6'6"	30	54	2.7	6
RWF0503	216.00	RWF0503T	249.00	RWF0503C24	267.00	500	347	40	2	6'6"	30	54	2.7	6
RWF0751	183.00	---	---	---	---	750	120	40	2	6'6"	67	121	2.7	6
RWF0758	179.00	---	---	---	---	750	208	40	2	6'6"	67	121	2.7	6
RWF0752	179.00	---	---	---	---	750/563	240/208	40	2	6'6"	67	121	2.7	6
RWF0753	224.00	RWF0753T	258.00	RWF0753C24	276.00	750	347	40	2	6'6"	67	121	2.7	6
RWF1001	185.00	---	---	---	---	1000	120	40	2	6'6"	76	136	2.7	6
RWF1008	182.00	---	---	---	---	1000	208	40	2	6'6"	76	136	2.7	6
RWF1002	182.00	---	---	---	---	1000/750	240/208	40	2	6'6"	76	136	2.7	6
RWF1003	227.00	RWF1003T	261.00	RWF1003C24	279.00	1000	347	40	2	6'6"	76	136	2.7	6
RWF1251	195.00	---	---	---	---	1250	120	75	2.1	6'10"	65	117	2.7	6
RWF1258	192.00	---	---	---	---	1250	208	75	2.1	6'10"	65	117	2.7	6
RWF1252	192.00	---	---	---	---	1250/938	240/208	75	2.1	6'10"	65	117	2.7	6
RWF1253	237.00	RWF1253T	270.00	RWF1253C24	288.00	1250	347	75	2.1	6'10"	65	117	2.7	6
RWF1501	199.00	---	---	---	---	1500	120	75	2.1	6'10"	79	141	2.7	6
RWF1508	195.00	---	---	---	---	1500	208	75	2.1	6'10"	79	141	2.7	6
RWF1502	195.00	---	---	---	---	1500/1125	240/208	75	2.1	6'10"	79	141	2.7	6
RWF1503	240.00	RWF1503T	273.00	RWF1503C24	291.00	1500	347	75	2.1	6'10"	79	141	2.7	6
---	---	---	---	---	---	2000	120	75	2.1	6'10"	111	199	2.7	6
RWF2002	212.00	---	---	---	---	2000/1500	240/208	75	2.1	6'10"	111	199	2.7	6
RWF2008	213.00	---	---	---	---	2000	208	75	2.1	6'10"	111	199	2.7	6
RWF2003	258.00	RWF2003T	291.00	RWF2003C24	309.00	2000	347	75	2.1	6'10"	111	199	2.7	6

Add W for white or SW for soft white (consult the optional colours chart or contact your Stelpro representative for all other colours).
Models also available in 277 V. --- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
RWFT1*	built-in single pole thermostat [120 V-347 V]	32.00
RWFT2	built-in double pole thermostat [120 V-347 V]	44.00
RWFSA*	surface adapter	45.00

* Add W for white or SW for soft white.

TECHNICAL DRAWINGS

