

SOA | OASIS™

WALL FAN HEATER



oasis®

GRANDS
PRIX
DU DESIGN



MAKE YOUR BATHROOM AN OASIS OF PEACE AND TRANQUILITY

The quiet and discreet Oasis bathroom fan heater provides all the comfort you need. It features a highly accurate electronic thermostat and optimal heat output, so you can easily and rapidly control the comfort-level of your rooms. Also offered without a thermostat, it's the perfect little device to heat small rooms like vestibules or hallways. In addition, its refined look and high-performance polymer finish blend in with any decor.

ULTRA-QUIET FAN HEATER

HEAT "BOOST" MODE

FAST TEMPERATURE INCREASE
(1000 W TO 2000 W)†

FEATURING HIGH-PERFORMANCE POLYMER AND SATIN-FINISH PAINTED STEEL

OPTIONAL BUILT-IN ELECTRONIC THERMOSTAT

COLOUR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- high performance polymer cabinet and front edges, 20-gauge satin-finish steel front
- centrifugal fan that ensures a quiet and efficient airflow
- thermal protections with manual reset
- top front air intake and bottom front air discharge
- 6 ft (2 m) 16 gage molded cable with 3-prong grounded, 120 V plug (SOA1501PW model)

ELEMENT

- high-quality nichrome element that generates instant heat

CONTROL

MODEL WITHOUT A THERMOSTAT:

- an electronic wall thermostat is recommended

MODEL WITH A BUILT-IN THERMOSTAT:

- built-in electronic thermostat
- 1000 W to maintain temperature setpoint
- 2000 W when "boost" mode is activated (with a timer)
- drastic temperature drop detection (open window function)

INSTALLATION

- recessed or surface mounted – surface adapter not required
- on the wall, a minimum of 6 in. from the floor
- front easy to install with only one mounting screw
- power switch selector – 1000 W or 2000 W (model without a thermostat only)

WARRANTY

- five years, *three years on electronic components

† 5°C (9°F) temperature rise within five minutes. (Tests performed with the 2000 W model in a 70 ft² room.)



ALSO AVAILABLE
EASY INSTALLATION WITH 120 V PLUG

IDEAL FOR:

bathroom, entrance, vestibule, hallway, living space

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.






TECHNICAL SPECIFICATIONS

PRODUCT	WITH THERMOSTAT		WITHOUT THERMOSTAT	VOLTAGE	HEIGHT		LENGTH		WEIGHT		PRICE
	HEATING	HEAT "BOOST" MODE			MM	IN.	MM	IN.	KG	LB	
CODE	WATTS	WATTS	WATTS	VOLTS	MM	IN.	MM	IN.	KG	LB	
SOA2002W	1000/750	2000/1500	---	240/208	402	15 13/16	305	12	3.6	7.9	378.00
SOA2002WCW	---	---	2000/1500 or 1000/750*	240/208	402	15 13/16	305	12	3.6	7.9	305.00
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)											
SOA1501PW	1000	1500	---	120	402	15 13/16	305	12	3.6	7.9	418.00

* Select when installing with a power switch

TECHNICAL DRAWINGS

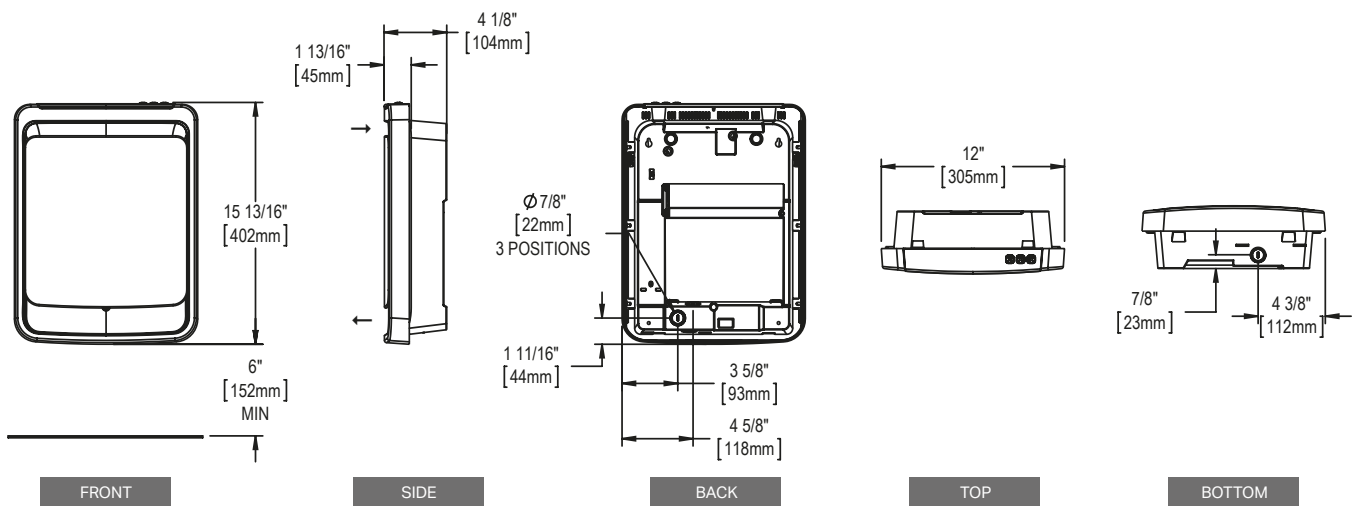

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.