

ASOA | OASIS™

WALL FAN HEATER



oasis®

GRANDS
PRIX
DU DESIGN



MAKE YOUR BATHROOM AN OASIS OF PEACE AND TRANQUILITY

The quiet and discreet Oasis bathroom fan heater provides all the comfort you need. It features a highly accurate electronic thermostat and optimal heat output, so you can easily and rapidly control the comfort-level of your rooms. Also offered without a thermostat, it's the perfect little device to heat small rooms like vestibules or hallways. In addition, its refined look and high-performance polymer finish blend in with any decor.

- **ULTRA-QUIET FAN HEATER**
- **HEAT "BOOST" MODE**
FAST TEMPERATURE INCREASE
(1000 W TO 2000 W) †
- **FEATURING HIGH-PERFORMANCE
POLYMER AND SATIN-FINISH
PAINTED STEEL**
- **OPTIONAL BUILT-IN
ELECTRONIC THERMOSTAT**

COLOR

- white

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- high performance polymer cabinet and front edges, 20-gauge satin-finish steel front
- centrifugal fan that ensures a quiet and efficient airflow
- thermal protections with manual reset
- top front air intake and bottom front air discharge
- 6 ft (2 m) 16 gage molded cable with 3-prong grounded, 120 V plug (ASOA1501PW model)

ELEMENT

- high-quality nichrome element that generates instant heat

CONTROL

MODEL WITHOUT A THERMOSTAT:

- an electronic wall thermostat is recommended

MODEL WITH A BUILT-IN THERMOSTAT:

- built-in electronic thermostat
- 1000 W to maintain temperature setpoint
- 2000 W when "boost" mode is activated (with a timer)
- drastic temperature drop detection (open window function)

INSTALLATION

- recessed or surface mounted – surface adapter not required
- on the wall, a minimum of 6 in. from the floor
- front easy to install with only one mounting screw
- power switch selector – 1000 W or 2000 W (model without a thermostat only)

WARRANTY

- five years, *three years on electronic components

† 9°F temperature rise within five minutes. (Tests performed with the 2000 W model in a 70 ft² room.)



ALSO AVAILABLE

**EASY INSTALLATION
WITH 120 V PLUG**

IDEAL FOR:

bathroom, entrance, vestibule, hallway, living space

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_SOA_US_150623




TECHNICAL SPECIFICATIONS

PRODUCT	WITH THERMOSTAT				WITHOUT THERMOSTAT		VOLTAGE	HEIGHT	LENGTH	WEIGHT
	HEATING		HEAT "BOOST" MODE							
CODE	WATTS	BTU/H	WATTS	BTU/H	WATTS	BTU/H	VOLTS	IN.	IN.	LB
ASOA1501W	1000	3413	1500	5119	---	---	120	15 13/16	12	7.9
ASOA1501WCW	---	---	---	---	1500	5119	120	15 13/16	12	7.9
ASOA2002W	1000/750	3413/2560	2000/1500	6825/5119	---	---	240/208	15 13/16	12	7.9
ASOA2002WCW	---	---	---	---	2000/1500 or 1000/750*	6825/5119 or 3413/2560*	240/208	15 13/16	12	7.9
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)										
ASOA1501PW	1000	3413	1500	5119	---	---	120	15 13/16	12	7.9

* Selected when installed with a power switch.

TECHNICAL DRAWINGS

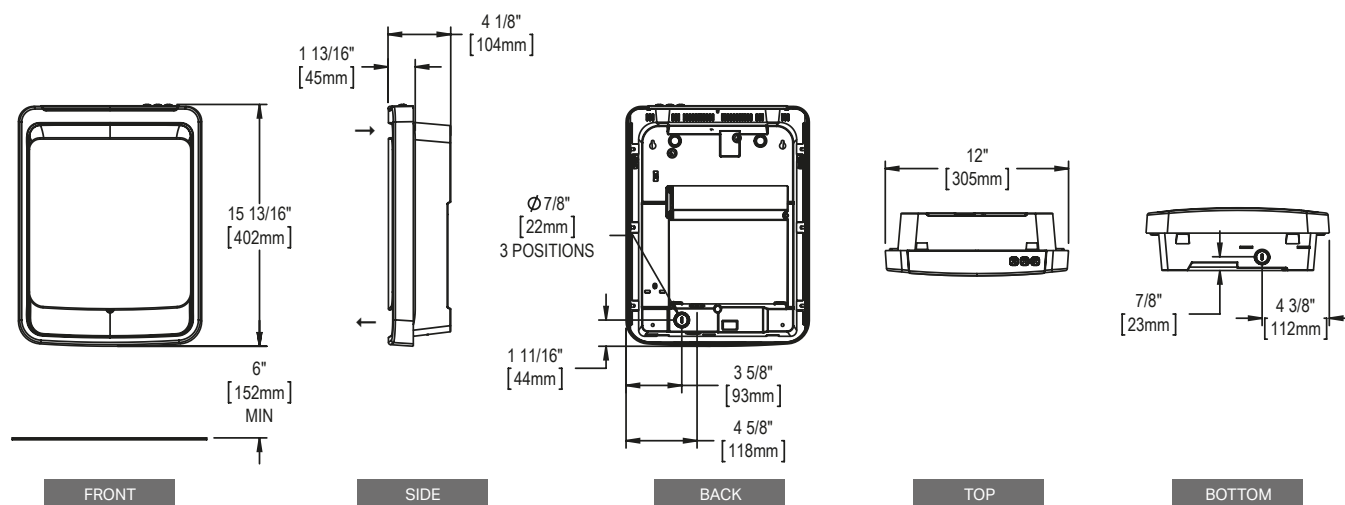

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.