



360 COMFORT

°STELPRO is a family-owned business established in Quebec for over 35 years, renowned in the electric heating industry, heating cables, ventilation (HVAC) and electronic controls. North American leader in its market, °STELPRO offers quality heating products designed and manufactured in Canada.

°STELPRO is your global comfort solution to enhance your clients' living environment. Peak performance is complemented by optimal efficiency and striking designs, uniting all aspects of 360 comfort.




STELPRO.COM
1 844-STELPRO



DEP_CABLESCHAUFFANTS_EN_0719

CONSTANT WATTAGE

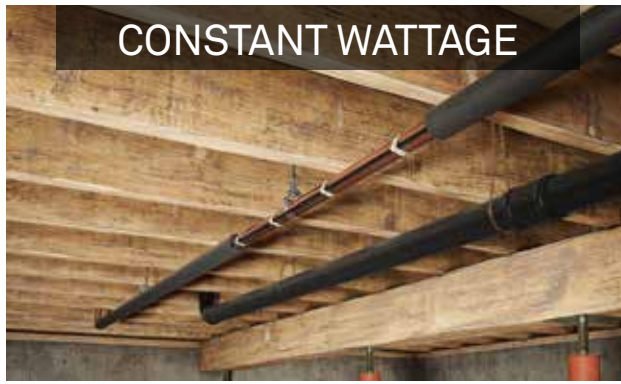

PIPE FREEZE PROTECTION HEATING CABLE SCPT SERIES

PREVENTS PIPE BREAKAGE AND WATER DAMAGE

IDEAL FOR PLASTIC OR METAL PIPES

LIGHTED PLUG POWER INDICATOR

INTEGRATED THERMOSTAT THAT TRIGGERS AT 3 °C (37 °F) TO PREVENT FREEZING

POWER:
7 W/ft @ 120 V



ROOF AND GUTTER DE-ICING HEATING CABLE SCRG SERIES

PREVENTS ROOF DAMAGE AND LEAKING

KEEPS GUTTERS AND DOWNSPOUTS FLOWING

PREASSEMBLED • READY TO INSTALL

THERMOSTAT WITH TEMPERATURE AND MOISTURE SENSORS (OPTIONAL)

POWER:
5 W/ft @ 120 V



SELF-REGULATING



FREEZE PROTECTION CABLE REEL SSFR SERIES

ENERGY EFFICIENT

EASY INSTALLATION

SAFE

POWER CONNECTION, SPLICE, TEE AND END SEAL KIT

POWER:
5 W/ft and 8 W/ft @ 120 V
5 W/ft, 8 W/ft and 10 W/ft @ 240 V



FREEZE PROTECTION PREASSEMBLED CABLE SSFP SERIES

SELF-REGULATING PREASSEMBLED CABLE

FOR RESIDENTIAL AND COMMERCIAL APPLICATIONS

240 V MODELS AVAILABLE WITH THREE-WIRE PIGTAIL

WIDE VARIETY OF LENGTHS

POWER:
5 W/ft at 50°F (10°C) @ 120 V and 240 V



THE ULTIMATE COMFORT

HEATING CABLE SOLUTIONS





UNIVERSAL HEATING CABLE SCU SERIES



UNCOUPLING MEMBRANES OR
CABLE SPACERS INSTALLATION

COMPATIBLE WITH MOST
TYPES OF FLOORING

OPTIMAL AND UNIFORM HEAT

FLEXIBLE,
EASY-TO-HANDLE CABLE

TECHNICAL SPECIFICATIONS:

Voltages available: 120 V, 240 V/208 V
Surface (membranes): from 12.9 to 289.0 ft²
Surface (cable spacers): from 12.5 to 368.7 ft²
according to space and density available

POWER:

9 W/ft² - 4 spaces (cable spacers)
12 W/ft²- 3 spaces (membranes or cable spacers)



UNCOUPLING
MEMBRANE AVAILABLE
TO EASE INSTALLATION OF
CERAMIC FLOOR



HEATING CABLE MAT SFM/SFMC SERIES



NEW!
CUSTOM SIZES
NOW AVAILABLE

PERSIA™
CUSTOM

QUICK, SAFE AND EASY INSTALLATION

STANDARD AND CUSTOM SIZES AVAILABLE

THE MEMBRANE PROTECTS THE CABLE DURING
INSTALLATION.

COMPATIBLE WITH ALL TYPES OF MORTAR, ADHESIVE
MORTAR, POLYMER-MODIFIED MORTAR (THINSET)
AND SELF-LEVELLING MORTAR TYPICALLY USED
FOR FLOOR COVERINGS

TECHNICAL SPECIFICATIONS:

Voltages available: 120 V, 240 V/208 V
Surface: from 12.3 to 144.0 ft²

POWER:

9 W/ft² @ 208 V
12 W/ft² @ 120 V or 240 V



HEATING CABLE ON LATTICE FOR CONCRETE SECM SERIES



IDEAL FOR NEW CONSTRUCTION, RESIDENTIAL
AND COMMERCIAL PROJECTS

CONCRETE SLAB HEATING WITH NO LIQUID OR PUMP

CAN BE INSTALLED WITH OR WITHOUT
A METAL FRAME FOR REINFORCED CONCRETE

PERFECT FOR PEOPLE WITH ALLERGIES

TECHNICAL SPECIFICATIONS:

Voltages available: 240 V/208 V
Surface: from 12 to 292 ft²

POWER:

9 W/ft² @ 208 V
12 W/ft² @ 240 V



SNOW MELTING SYSTEM SSC/SSCM SERIES



NEW!

AVAILABLE IN MAT OR CABLE FORMAT

LONGER INFRASTRUCTURE LIFESPAN

REDUCES THE NEED FOR CHIMICALS
AND ABRASIVES

CAN BE INSTALLED UNDER CONCRETE,
ASPHALT AND PAVERS

TECHNICAL SPECIFICATIONS:

Voltages available: 240 V/208 V, 347 V
Surface: from 9 to 120 ft²

POWER:

50 W/ft² @ 240 V or 347 V (3 in. spacing)
37.5 W/ft² @ 208 V (3 in. spacing)

