


CBB

SLOPED COMMERCIAL BASEBOARD

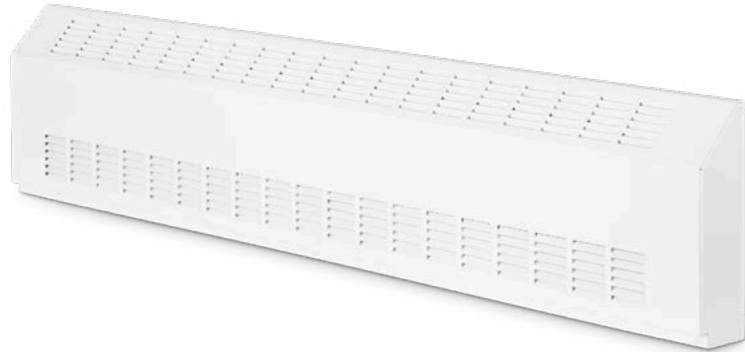

TOP OF ITS CLASS

The CBB was designed to provide optimal heating output in public areas, such as shopping centres, schools, daycare centres, and hospitals. This high-profile baseboard heater is durable enough to meet the needs of schools and other densely populated buildings. The CBB is available in several watt densities. Nothing warms you like the CBB!

■ **ROBUST CASING**
SPECIALLY DESIGNED
FOR HIGH-TRAFFIC AREAS

■ **SLOPED TOP**
MAKING IT LESS LIKELY TO
BE SAT ON OR USED AS A SHELF

■ **OFFERED IN THREE WATT DENSITIES**

■ **BLANK SECTIONS AVAILABLE**
FOR A CONTINUOUS LOOK

COLORS

- **standard:** white
- **Orora (optional):** refer to stelpro.com/en/orora/

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 18-gauge steel cabinet and 16-gauge front panel
- thermal protection with automatic reset
- full-length wireway
- pencil-proof openings of less than 1/4 in. prevent foreign objects from entering the unit
- protective wire mesh available for front cover (optional)

ELEMENT

- single tubular, stainless steel sheathed element with boxed aluminum fins for improved heat dissipation; the element is securely fastened at its centre, floating in nylon sleeves at each end, eliminating expansion and contraction noises

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in tamper-proof thermostat accessible without removing front grille, installed in the left junction box only (optional)
- low voltage relay kit installed in the left or right junction box (optional)

INSTALLATION

- surface mounted
- wall or floor mounted with or without pedestal kit (optional)
- wiring compartments at both ends of unit
- blank sections (custom lengths) and accessories are available for a continuous look (optional)

WARRANTY

- three years

IDEAL FOR:

school, shopping centre, hospital, daycare centre

°STELPRO

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.

TECHNICAL SPECIFICATIONS

DENSITY OF 250 W PER LINEAR FOOT			DENSITY OF 200 W PER LINEAR FOOT			DENSITY OF 150 W PER LINEAR FOOT			VOLTAGE	LENGTH	WEIGHT
CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	CODE	WATTS	BTU/H	VOLTS	IN.	LB
CBB6051W	500	1706	CBB6041W	400	1365	CBB6031W	300	1024	120	23 5/8	14
CBB6058W	500	1706	CBB6048W	400	1365	CBB6038W	300	1024	208	23 5/8	14
CBB6052W	500	1706	CBB6042W	400	1365	CBB6032W	300	1024	240	23 5/8	14
CBB6057W	500	1706	---	400	1365	---	300	1024	277	23 5/8	14
---	500	1706	---	400	1365	---	300	1024	480	23 5/8	14
CBB9071W	750	2560	CBB9061W	600	2048	CBB9041W	450	1536	120	35 7/16	20
CBB9078W	750	2560	CBB9068W	600	2048	CBB9048W	450	1536	208	35 7/16	20
CBB9072W	750	2560	CBB9062W	600	2048	CBB9042W	450	1536	240	35 7/16	20
CBB9077W	750	2560	CBB9067W	600	2048	CBB9047W	450	1536	277	35 7/16	20
CBB9075W	750	2560	---	600	2048	---	450	1536	480	35 7/16	20
CBB12101W	1000	3413	CBB12081W	800	2730	CBB12061W	600	2048	120	47 1/4	30
CBB12108W	1000	3413	CBB12088W	800	2730	CBB12068W	600	2048	208	47 1/4	30
CBB12102W	1000	3413	CBB12082W	800	2730	CBB12062W	600	2048	240	47 1/4	30
CBB12107W	1000	3413	CBB12087W	800	2730	CBB12067W	600	2048	277	47 1/4	30
CBB12105W	1000	3413	CBB12085W	800	2730	---	600	2048	480	47 1/4	30
CBB15121W	1250	4266	CBB15101W	1000	3413	CBB15071W	750	2560	120	59 1/16	37
CBB15128W	1250	4266	CBB15108W	1000	3413	CBB15078W	750	2560	208	59 1/16	37
CBB15122W	1250	4266	CBB15102W	1000	3413	CBB15072W	750	2560	240	59 1/16	37
CBB15127W	1250	4266	CBB15107W	1000	3413	CBB15077W	750	2560	277	59 1/16	37
CBB15125W	1250	4266	CBB15105W	1000	3413	CBB15075W	750	2560	480	59 1/16	37
CBB18151W	1500	5119	CBB18121W	1200	4095	CBB18091W	900	3071	120	70 7/8	44
CBB18158W	1500	5119	CBB18128W	1200	4095	CBB18098W	900	3071	208	70 7/8	44
CBB18152W	1500	5119	CBB18122W	1200	4095	CBB18092W	900	3071	240	70 7/8	44
CBB18157W	1500	5119	CBB18127W	1200	4095	CBB18097W	900	3071	277	70 7/8	44
CBB18155W	1500	5119	CBB18125W	1200	4095	CBB18095W	900	3071	480	70 7/8	44
---	1750	5972	CBB21141W	1400	4778	CBB21101W	1050	3583	120	82 11/16	51
CBB21178W	1750	5972	CBB21148W	1400	4778	CBB21108W	1050	3583	208	82 11/16	51
CBB21172W	1750	5972	CBB21142W	1400	4778	CBB21102W	1050	3583	240	82 11/16	51
CBB21177W	1750	5972	CBB21147W	1400	4778	CBB21107W	1050	3583	277	82 11/16	51
CBB21175W	1750	5972	CBB21145W	1400	4778	CBB21105W	1050	3583	480	82 11/16	51
---	2000	6825	---	1600	5460	CBB24121W	1200	4095	120	94 1/2	59
CBB24208W	2000	6825	CBB24168W	1600	5460	CBB24128W	1200	4095	208	94 1/2	59
CBB24202W	2000	6825	CBB24162W	1600	5460	CBB24122W	1200	4095	240	94 1/2	59
CBB24207W	2000	6825	CBB24167W	1600	5460	CBB24127W	1200	4095	277	94 1/2	59
CBB24205W	2000	6825	CBB24165W	1600	5460	CBB24125W	1200	4095	480	94 1/2	59
---	2250	7679	---	1800	6143	---	1350	4607	120	106 5/16	61
CBB27228W	2250	7679	CBB27188W	1800	6143	CBB27138W	1350	4607	208	106 5/16	61
CBB27222W	2250	7679	CBB27182W	1800	6143	CBB27132W	1350	4607	240	106 5/16	61
CBB27227W	2250	7679	CBB27187W	1800	6143	CBB27137W	1350	4607	277	106 5/16	61
CBB27225W	2250	7679	CBB27185W	1800	6143	CBB27135W	1350	4607	480	106 5/16	61
---	2500	8532	---	2000	6825	---	1500	5119	120	106 5/16	61
CBB27258W	2500	8532	CBB27208W	2000	6825	CBB27158W	1500	5119	208	106 5/16	61
CBB27252W	2500	8532	CBB27202W	2000	6825	CBB27152W	1500	5119	240	106 5/16	61
CBB27257W	2500	8532	CBB27207W	2000	6825	CBB27157W	1500	5119	277	106 5/16	61
CBB27255W	2500	8532	CBB27205W	2000	6825	CBB27155W	1500	5119	480	106 5/16	61

Consult the optional colors chart or contact your Stelpro representative for all other colors.
 --- not available




ACCESSORIES

PRODUCT	DESCRIPTION
CBBT12*	built-in tamper-proof single pole thermostat
CBBT22*	built-in tamper-proof double pole thermostat
CBBRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]
CBBRE156*	built-in electronic low voltage relay [6 A @ 600 V]
CBBRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]
CBBRM240T*	built-in electromechanical relay c/w transformer 24 V [6000 W @ 240 V and 5200 W @ 208 V]
CBBRM347T*	built-in electromechanical relay c/w transformer 24 V [6000 W @ 347 V]
CBBRM347C*	built-in electromechanical relay w/o transformer 24 V [6000 W @ 120 V-347 V]
CBBR841D1036*	built-in electromechanical relay w/o transformer 24 V [6000 W @ 600 V]
CBBR841C1151*	built-in electromechanical low voltage relay c/w transformer 24 V [6000 W @ 600 V]
CBBDIS250*	disconnect switch [120 V-250 V] [17 A @ 120 V-12 A @ 250 V]
CBBDIS600*	disconnect switch [277 V-600 V]
PK2W	pedestal kit (kit of two)
CBBJSW	joiner strip (2 in.)
CBBC90W	inside corner (back measures 6 1/16 in. long on each side)
CBBOC90W	outside corner (back measures 6 1/16 in. long on each side)
CBBCBW*	clean back (fully finished, no mounting holes or knockouts)
CBBWMW-XXXXMM	protective wire mesh for front cover (units from 23 5/8 in. to 59 1/16 in.)
	protective wire mesh for front cover (units from 70 7/8 in. to 106 5/16 in.)

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Factory installed * Factory installation is strongly recommended.

TECHNICAL DRAWINGS

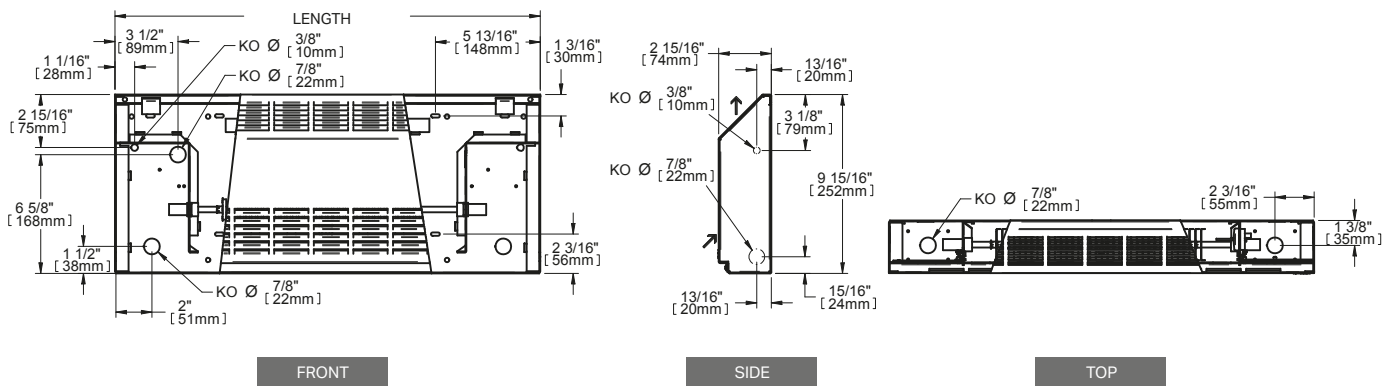

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.