









# THE MOST DISCREET ON THE MARKET!

The Mirage convector has a unique, modern and discreet look and offers unquestionable efficiency. Available with or without an ultraprecise integrated electronic thermostat and in several voltages, the Mirage is suitable for rooms in homes or businesses. With its simple facade and elegant design, the Mirage blends in with any decor.

- BLENDS IN WITH ANY DECOR
- STURDY ONE-PIECE FRONT PANEL
- TOTALLY QUIET
- BUILT-IN ELECTRONIC THERMOSTAT (OPTIONAL)
   WITH BACKLIT SCREEN
- ADAPTS TO MULTIPLE MARKETS AVAILABLE IN 120 V, 208 V, 240 V, 347 V AND 600 V

**BUILT-IN ELECTRONIC THERMOSTAT AVAILABLE** FOR THE 120 V TO 240 V MODELS



# **IDEAL FOR:**

kitchen, living room, bedroom, basement, commercial space, office

#### **COLOURS**

- standard: white
- Orora (optional): refer to stelpro.com/orora/

#### **FINISH**

• epoxy-polyester powdercoat

## **MANUFACTURING**

- 20-gauge steel cabinet and front
- the cabinet height improves the chimney effect
- bottom air intake and top air discharge
- 6 ft (2 m) 16 gage molded cable with 3-prong grounded, 120 V plug (MIR1501P model)

#### **ELEMENTS**

 two stainless steel tubular sheathed elements insulated with nylon sleeves reducing expansion and contraction noises

#### CONTROL

- electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)
- automatic temperature lowering at night (Automatic mode)
- maximum temperature setpoint lock option (Security mode)

## **INSTALLATION**

- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)

### WARRANTY

five years, \*three years on electronic components

		Т	ECHN	IICAL SF	PECIFICA	4OITA	1S				
BUILT-IN THERMOSTAT		WITHOUT THERMOSTAT		POWER	VOLTAGE	HEI	GHT	LEN	NGTH	WE	IGHT
CODE	PRICE	CODE	PRICE	WATTS	VOLTS	MM	IN.	MM	IN.	KG	LB
MIR0501W	378.00	MIR0501WCW	304.00	500	120	457	18	444	17 1/2	5.3	11.75
MIR0508W	376.00	MIR0508WCW	304.00	500	208	457	18	444	17 1/2	5.3	11.75
MIR0502W	328.00	MIR0502WCW	257.00	500/375	240/208	457	18	444	17 1/2	5.3	11.75
		MIR0503WCW	383.00	500	347	457	18	444	17 1/2	5.3	11.75
MIR1001W	399.00	MIR1001WCW	322.00	1000	120	457	18	597	23 1/2	6.7	14.75
MIR1008W	399.00	MIR1008WCW	323.00	1000	208	457	18	597	23 1/2	6.7	14.75
MIR1002W	350.00	MIR1002WCW	276.00	1000/750	240/208	457	18	597	23 1/2	6.7	14.75
		MIR1003WCW	401.00	1000	347	457	18	597	23 1/2	6.7	14.75
		MIR1006WCW	401.00	1000	600	457	18	597	23 1/2	6.7	14.75
MIR1501W	414.00	MIR1501WCW	338.00	1500	120	457	18	749	29 1/2	8	17.75
MIR1508W	416.00	MIR1508WCW	341.00	1500	208	457	18	749	29 1/2	8	17.75
MIR1502W	367.00	MIR1502WCW	293.00	1500/1125	240/208	457	18	749	29 1/2	8	17.75
		MIR1503WCW	419.00	1500	347	457	18	749	29 1/2	8	17.75
		MIR1506WCW	419.00	1500	600	457	18	749	29 1/2	8	17.75
MIR2008W	435.00	MIR2008WCW	357.00	2000	208	457	18	902	35 1/2	9.4	20.75
MIR2002W	385.00	MIR2002WCW	307.00	2000/1500	240/208	457	18	902	35 1/2	9.4	20.75
		MIR2003WCW	437.00	2000	347	457	18	902	35 1/2	9.4	20.75
		MIR2006WCW	437.00	2000	600	457	18	902	35 1/2	9.4	20.75
MODEL WITH 120 V PLUG (RESIDENTIAL OUTLET)											
MIR1501PW*	441.00			1500	120	457	18	749	29 1/2	8	17.75

Consult the optional colour chart and contact your Stelpro representative for all other colours.

Mechanical wall thermostats are not compatible with the without thermostat model (WC). An electronic thermostat is required. Models also available in 277 V and 480 V.

\* Available in white only

<sup>---</sup> not available


ACCESSORIES				
PRODUCT	DESCRIPTION	PRICE		
MIRRE153*	MIRRE153* built-in electronic low voltage relay [15 A @ 120 V-347 V]			
MIRRE156*	built-in electronic low voltage relay [6 A @ 600 V]			
MIRRE153T**	built-in electronic low voltage relay w/ transformer 24 V [15 A @ 208 V-347 V]			

Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

<sup>\*</sup> Transformer is supplying 27.5 Vac to thermostat when triac is used at 347 Vac. Here is the voltage supplied by the transformer when triac is used at other voltages:

VOLTAGE TRIAC							
347 Vac	277 Vac	240 Vac	208 Vac				
27.5 V	21.2 V	19.0 V	16.5 V				

# **TECHNICAL DRAWINGS**

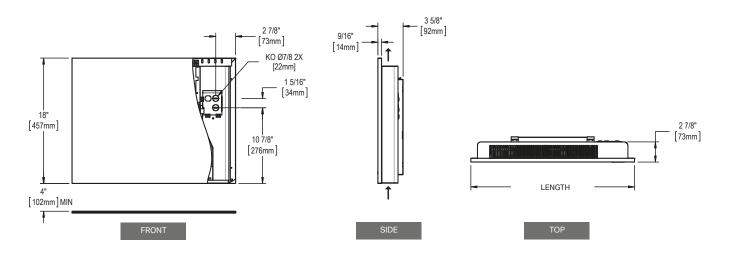

<sup>\*</sup> Factory installed