

PYROBOX

CONTROL PANELS FOR SNOW MELTING SYSTEMS



- **THREE MODELS AVAILABLE**
FOR MAXIMUM COMPATIBILITY
BASED ON REQUIRED VOLTAGE
- **CABLE PASS-THROUGH
HOLES UNDER THE PANEL**
MAKE INSTALLATION EASIER
FOR THE ELECTRICIAN
- **EASY TO OPERATE**
EASY TO USE AND PROGRAM
CONTROLLER
- **MULTI-ZONE CONTROL**
FIVE ZONES POSSIBLE THANKS
TO SEQUENTIAL CONTROL
- **COMPATIBLE WITH SIT-6E**
PAVER SENSOR

COLOUR

- grey

MANUFACTURING

- built-in adjustable GFCI
- IP20 enclosure protection for Indoor installation

APPLICATIONS

- driveways
- sidewalks
- loading docks
- stairs and pavement

CONTROL

- electronic with adjustable parameters for customized installations
- test mode to perform a quick system check
- a third-party terminal is available to connect a SIT-6E™ sensor and control some or all zones
- sequencing zone option: enables larger snow melting area with reduced power consumption on site
- multiple snow sensor input (optional)
- energy efficient algorithm
- adjustable setpoints: upper and lower limit temperature, hold ON/OFF delay, manual ON and time splitting between zones

DIMENSIONS

- Pyrobox 3 and 3C
15x12x6 in. (380x300x155 mm)
- Pyrobox5
20x20x8 in. (500x500x200 mm)

WARRANTY

- two years

DESIGNED FOR:



SSC/SSCM


TECHNICAL SPECIFICATIONS

PRODUCT	NUMBER OF CONTACTORS	POLES PER CONTACTOR	TOTAL AMPERAGE	MAXIMUM VOLTAGE	PRICE
CODE			AMPS	VOLTS	
PYROBOX3	4	2P	120	277	6 392.00
PYROBOX3C	3	2X3P + 1X2P	330	600	8 014.00
PYROBOX5	5	4X3P + 1X2P	600	600	8 808.00



Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.



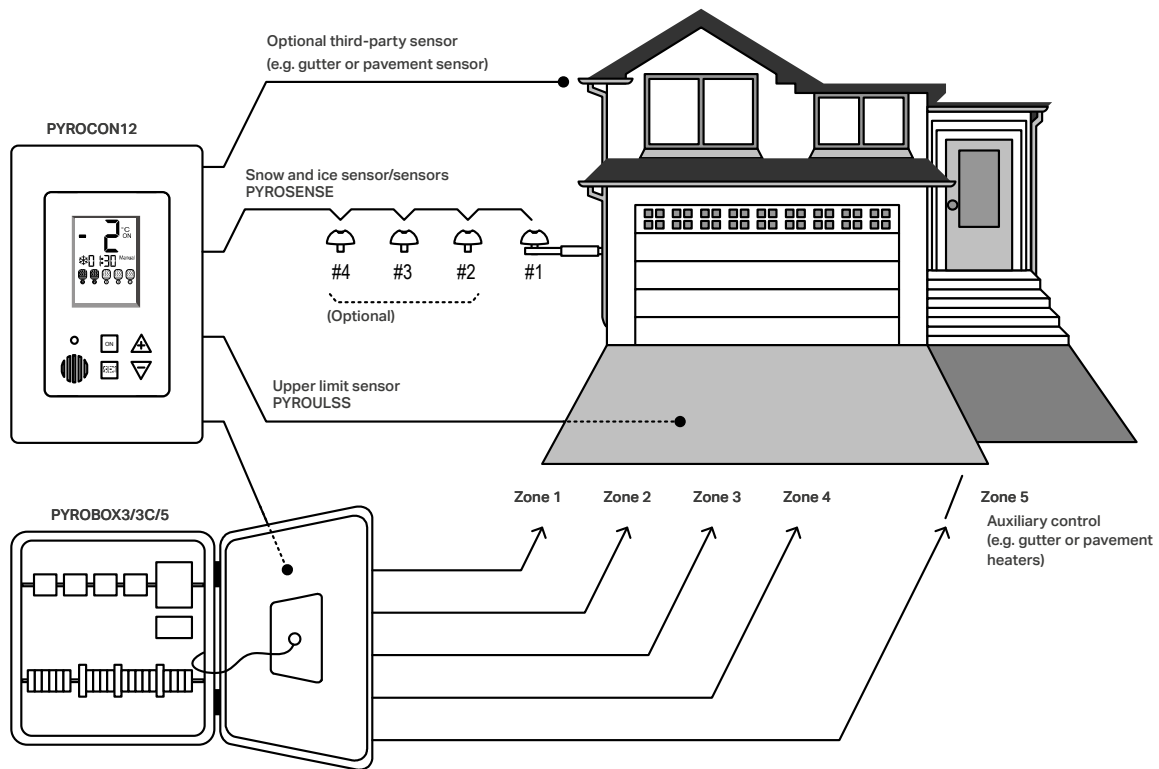

PYROSENSE

SNOW AND TEMPERATURE SENSOR

- 30-foot connection cable
- Shaped to avoid snow build-up
- Four spikes to keep birds away
- Easy to configure with the controller



PYROSB

RUSTPROOF METAL SUPPORT DESIGNED FOR THE PYROSENSE SENSOR

- Adjustable length (up to 24 inches)
- Holes on the side to secure the PYROSENSE cable with cable ties



PYROULS

TEMPERATURE SENSOR

- Measures ground temperature to prevent the cable from heating if the ground is already warm
- 30 feet in length

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
PYROSENSE	electronic snow and ice sensor for PYROBOX with 30 ft wire	928.00
PYROSB	wall-mounted adjustable metal bracket for the PYROSENSE	251.00
PYROULS	30 ft upper limit temperature sensor for PYROBOX	200.00