

ASCH

PORTABLE MULTIPURPOSE HEATER



EFFICIENT, SAFE AND VERSATILE

Any construction worker will tell you that the ASCH is the fast-acting heating unit most often found on construction sites, hence its nickname: "the construction heater." Housed in a 20-gauge steel casing, it features a rugged protective grille and nichrome element for instant heat at start-up. Despite its small size, this heating powerhouse boasts 4800 W. The ASCH can be placed on the ground or against a wall, using a support bracket, available as an option. This heater is right at home, on construction sites and in workshops and garages. Choose the ASCH when you need rapid, reliable heat.

- **SAFE AND RUGGED**
20-GAUGE STEEL
- **"COOL TOUCH" HOUSING**
- **4800 W HOUSED IN A SMALL UNIT**
- **OPEN COIL GENERATES INSTANT HEAT**
- **CAN BE INSTALLED ON THE WALL OR CEILING WITH A MOUNTING BRACKET (SOLD SEPARATELY)**

COLORS

- **standard:** red

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft. (2 m) 12 Awg. molded cable with 3-prong grounded
- thermal protection with automatic reset
- additional thermal protection provided by a fuse-link (must be replaced if triggered)
- pilot lights indicate when power is on and when thermal protection has been activated

MOTOR

- 250 CFM fan

ELEMENT

- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

CONTROL

- built-in thermostat with control knob protector

INSTALLATION

- connects to a standard 30 A 250 V (ASCH48T) or a 20 A 250 V (ASCH40T) grounded receptacle
- mounting bracket (sold separately) that can rotate at 360° while preventing the unit from tipping

WARRANTY

- two years

IDEAL FOR:

construction site, garages

°STELPRO

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.



TECHNICAL SPECIFICATIONS

PRODUCT	POWER		VOLTAGE	MOTOR	CONNECTION	COLOR	WEIGHT
CODE	WATTS	BTU/H	VOLTS	CFM			LB
ASCH40T	4000/3000	13 651	240/208	250	20 A 250 V plug	red	13
ASCH48T	4800/3600	16 381	240/208	250	30 A 250 V plug	red	13


ACCESSORY

PRODUCT	DESCRIPTION
SCH-WBB	mounting bracket

THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE	HEAT RISE
	KW	FT	°F
ASCH40T	4	19'4"	51
ASCH48T	4.8	19'4"	61

TECHNICAL DRAWINGS

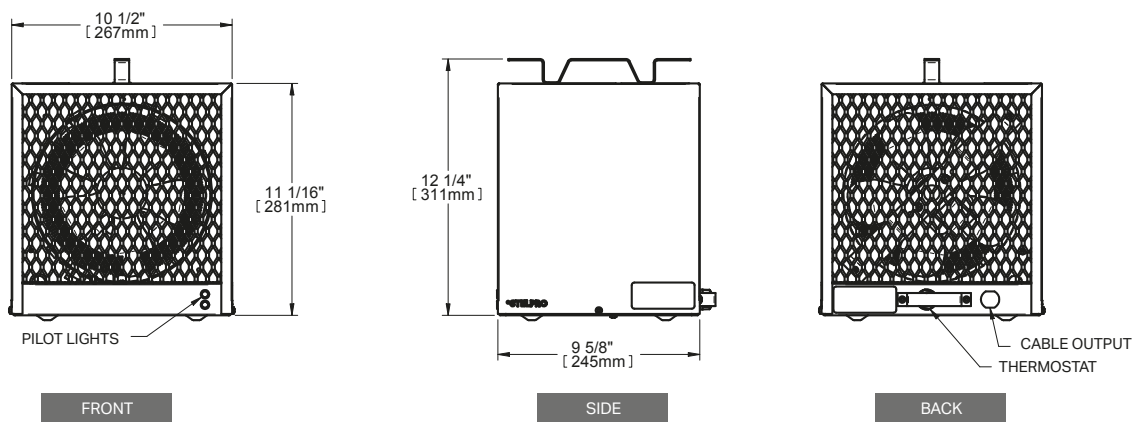

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.