


SCR – RADIANCE™

COVE HEATER

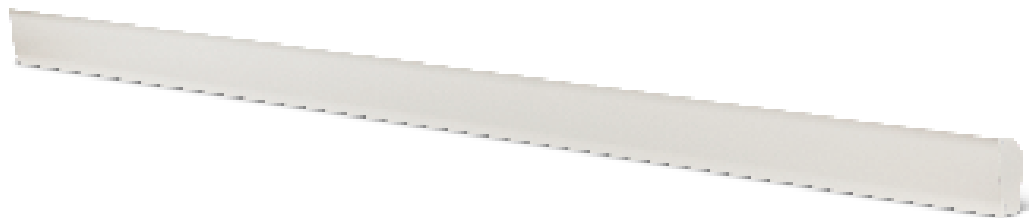

INNOVATION AT THE HEIGHT OF YOUR EXPECTATIONS

The Radiance cove heater is one of the most efficient heating systems available today. Mounted near the ceiling, the Radiance directs heat downward across the room, without being blocked by furniture and other objects. Radiant heat warms people in the room directly, creating comfortable conditions similar to the sun. The Radiance also warms all inanimate objects in its path; these objects absorb the heat and in turn act as a “heat reserve,” initiating a convection-type flow of heated air that further helps maintain the desired room temperature.

- **15% GREATER ENERGY PERFORMANCE COMPARED TO OTHER RADIANT HEATERS**
- **WALL MOUNTED 2.5 IN. FROM THE CEILING – OUT OF REACH OF CHILDREN AND FREES UP SPACE**
- **IDEAL FOR PEOPLE WITH ALLERGIES**
NO FORCED-AIR MOVEMENT
- **COMPACT AND LIGHTWEIGHT**
IDEAL FOR NEW CONSTRUCTIONS AND RETROFITS

COLORS

- **standard:** soft white
- **Orora (optional):** anodized aluminum paint and black only (refer to stelpro.com/en/orora/)

FINISH

- front panel: high temperature, high emissivity paint coating for maximum thermal efficiency
- other parts: hybrid epoxy-polyester powder paint

MANUFACTURING

- aluminum front panel
- 18-gauge steel cabinet and back box
- aluminum end covers
- 24-gauge stainless steel reflector
- full-length wireway
- designed and assembled for reduced noise from the expansion and contraction of metal during heating cycles

ELEMENT

- tubular; stainless steel

CONTROL

- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended
- built-in single pole bimetal thermostat installed in the left or right junction box (optional)

INSTALLATION

- wall mounted at a distance of 2.5 in. or more from the ceiling
- all flammable material must be 6 in. or more from the front of the unit

WARRANTY

- five years

IDEAL FOR:

main heat source for any room, above a window or patio door, living space, daycare center, school, playroom, locker room, spa, rooms with limited space



Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.

TECHNICAL SPECIFICATIONS

PRODUCT CODE	POWER		VOLTAGE	LENGTH	WEIGHT
	WATTS	BTU/H	VOLTS	IN.	LB
SCR0451SW	450	1536	120	34	6.4
SCR0458SW	450	1536	208	34	6.4
SCR0452SW	450/338	1536	240/208	34	6.4
SCR0457SW	450	1536	277	34	6.4
SCR0601SW	600	2048	120	47	8.9
SCR0608SW	600	2048	208	47	8.9
SCR0602SW	600/450	2048	240/208	47	8.9
SCR0607SW	600	2048	277	47	8.9
SCR0751SW	750	2560	120	59	11.1
SCR0758SW	750	2560	208	59	11.1
SCR0752SW	750/563	2560	240/208	59	11.1
SCR0757SW	750	2560	277	59	11.1
SCR0901SW	900	3071	120	71	13.0
SCR0908SW	900	3071	208	71	13.0
SCR0902SW	900/675	3071	240/208	71	13.0
SCR0907SW	900	3071	277	71	13.0
SCR1051SW	1050	3583	120	83	15.7
SCR1058SW	1050	3583	208	83	15.7
SCR1052SW	1050/788	3583	240/208	83	15.7
SCR1057SW	1050	3583	277	83	15.7
SCR1201SW	1200	4095	120	94	17.8
SCR1208SW	1200	4095	208	94	17.8
SCR1202SW	1200/900	4095	240/208	94	17.8
SCR1207SW	1200	4095	277	94	17.8
SCR1508SW	1500	5119	208	106	20.1
SCR1502SW	1500/1125	5119	240/208	106	20.1
SCR1507SW	1500	5119	277	106	20.1

Consult the optional colors chart or contact your Stelpro representative for all other colors.

ACCESSORIES

PRODUCT	DESCRIPTION
SCRSPSW	splice plate kit (for installing two units side by side)
SCRBTRSW*	single pole bimetal thermostat with right side end cover
SCRBTLSW*	single pole bimetal thermostat with left side end cover

* Factory installed

TECHNICAL DRAWINGS

