

WFA – ALUX™

ALUMINUM WALL FAN HEATER



WHEN DURABILITY AND PERFORMANCE MEET DESIGN

In need of a solid, stylish heater to warm your clients in the lobby or entrance of your business? The Alux series wall fan heater (WFA) with its remarkable rush of warm air is the solution. It has an aluminum extrusion grille that is striking, modern and unbelievably resistant. Imagine no more dents or rust! The WFA is suitable for recessed installation or can be surface mounted on a wall and is available in a large array of wattages to meet all your needs.

- **EXTRUDED ALUMINUM PROFILE WITH A UNIQUE, LUXURY DESIGN**
- **EXTREMELY SOLID, IMPACT AND RUST RESISTANT**
- **WIDE RANGE OF MODELS AND HEATING CAPACITIES INCLUDING A SINGLE 4800 W MODEL**
- **SIGNATURE NICHROME ELEMENT OFFERS SUPERIOR PERFORMANCE AND IMMEDIATE HEAT**

COLOURS

- **standard:** white
- **Orora (optional):** refer to www.stelpro.com/en-CA/Orora

FINISH

- epoxy-polyester powdercoat

MANUFACTURING

- 22-gauge steel cabinet
- extruded aluminum grille with a thickness equivalent to 13 gauge
- top air intake with bottom air discharge
- quiet helicoidal fan:
 - single unit 1 x 160 CFM
 - double unit 2 x 160 CFM
 - triple unit 3 x 160 CFM
- closed and permanently lubricated motor
- thermal protection with automatic reset

ELEMENT

- high-quality nichrome element producing instant heat

CONTROL

- connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)
- built-in thermostat (optional), 3 control knobs included (white, soft white and black) for standard installation, without knob for tamper-proof installation

INSTALLATION

- wall mounted
- recessed or surface mounted with surface adapter (optional)

WARRANTY

- three years

IDEAL FOR:

lobby, entrance, corridor, factory, warehouse, stairwell



Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.



TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		240 V CONTROL		24 V CONTROL		POWER		VOLTAGE		WEIGHT		MODEL	
CODE	PRICE	CODE	PRICE	CODE	CODE	PRICE	WATTS	VOLTS	KG	LB	UNIT				
WFA1501W	977.00	WFA1501TW	1 049.00	---	WFA1501C24W	1 204.00	1500	120	9.1	20	SINGLE				
WFA1508W	977.00	WFA1508TW	1 049.00	WFA1508CW	WFA1508C24W	1 204.00	1500	208	9.1	20	SINGLE				
WFA1502W	977.00	WFA1502TW	1 049.00	WFA1502CW	WFA1502C24W	1 204.00	1500/1125	240/208	9.1	20	SINGLE				
WFA1503W	1 335.00	WFA1503TW	1 410.00	WFA1503CW	WFA1503C24W	1 563.00	1500	347	9.1	20	SINGLE				
---	---	WFA1506TW	1 473.00	WFA1506CW	WFA1506C24W	1 627.00	1500	600	12	27	SINGLE				
WFA2008W	977.00	WFA2008TW	1 049.00	WFA2008CW	WFA2008C24W	1 204.00	2000	208	10.4	23	SINGLE				
WFA2002W	977.00	WFA2002TW	1 049.00	WFA2002CW	WFA2002C24W	1 204.00	2000/1500	240/208	10.4	23	SINGLE				
WFA2003W	1 335.00	WFA2003TW	1 410.00	WFA2003CW	WFA2003C24W	1 563.00	2000	347	10.4	23	SINGLE				
---	---	WFA2006TW	1 473.00	WFA2006CW	WFA2006C24W	1 627.00	2000	600	12	27	SINGLE				
WFA3008W	997.00	WFA3008TW	1 066.00	WFA3008CW	WFA3008C24W	1 226.00	3000	208	10.4	23	SINGLE				
WFA3002W	997.00	WFA3002TW	1 066.00	WFA3002CW	WFA3002C24W	1 226.00	3000/2250	240/208	10.4	23	SINGLE				
WFA3003W	1 359.00	WFA3003TW	1 433.00	WFA3003CW	WFA3003C24W	1 587.00	3000	347	10.4	23	SINGLE				
---	---	WFA3006TW	1 494.00	WFA3006CW	WFA3006C24W	1 646.00	3000	600	12	27	SINGLE				
WFA4008W	1 061.00	WFA4008TW	1 132.00	WFA4008CW	WFA4008C24W	1 286.00	4000	208	10.4	23	SINGLE				
WFA4002W	1 061.00	WFA4002TW	1 132.00	WFA4002CW	WFA4002C24W	1 286.00	4000/3000	240/208	10.4	23	SINGLE				
WFA4003W	1 419.00	WFA4003TW	1 494.00	WFA4003CW	WFA4003C24W	1 646.00	4000	347	10.4	23	SINGLE				
---	---	WFA4006TW	1 557.00	WFA4006CW	WFA4006C24W	1 709.00	4000	600	12	27	SINGLE				
WFA4808W	1 101.00	WFA4808TW	1 177.00	WFA4808CW	WFA4808C24W	1 342.00	4800	208	10.4	23	SINGLE				
WFA4802W	1 101.00	WFA4802TW	1 177.00	WFA4802CW	WFA4802C24W	1 342.00	4800/3600	240/208	10.4	23	SINGLE				
WFA4803W	1 481.00	WFA4803TW	1 558.00	WFA4803CW	WFA4803C24W	1 720.00	4800	347	10.4	23	SINGLE				
---	---	WFA4806TW	1 624.00	WFA4806CW	WFA4806C24W	1 787.00	4800	600	12	27	SINGLE				
---	---	WFA6008CTW	2 602.00	WFA6008CW	WFA6008C24W	2 531.00	6000	208	20	44	DOUBLE				
---	---	WFA6002TW	2 375.00	WFA6002CW	WFA6002C24W	2 531.00	6000/4500	240/208	20	44	DOUBLE				
---	---	WFA6003TW	2 993.00	WFA6003CW	WFA6003C24W	3 148.00	6000	347	20	44	DOUBLE				
---	---	WFA6006TW	2 993.00	WFA6006CW	WFA6006C24W	3 148.00	6000	600	22	48	DOUBLE				
---	---	WFA60083CTW*	2 693.00	WFA60083CW*	WFA60083C24W*	2 621.00	6000	208	36	80	TRIPLE				
---	---	WFA60063CTW*	3 312.00	WFA60063CW*	WFA60063C24W*	3 242.00	6000	600	36	80	TRIPLE				
---	---	WFA8008CTW	2 747.00	WFA8008CW	WFA8008C24W	2 673.00	8000	208	20	44	DOUBLE				
---	---	WFA8002CTW	2 747.00	WFA8002CW	WFA8002C24W	2 673.00	8000/6000	240/208	20	44	DOUBLE				
---	---	WFA8003CTW	3 603.00	WFA8003CW	WFA8003C24W	3 533.00	8000	347	20	44	DOUBLE				
---	---	WFA8006CTW	3 603.00	WFA8006CW	WFA8006C24W	3 533.00	8000	600	22	48	DOUBLE				
---	---	WFA90083CTW*	3 709.00	WFA90083CW*	WFA90083C24W*	3 636.00	9000	208	36	80	TRIPLE				
---	---	WFA90063CTW*	4 713.00	WFA90063CW*	WFA90063C24W*	4 638.00	9000	600	36	80	TRIPLE				
---	---	WFA12008CTW	4 019.00	WFA12008CW	WFA12008C24W	3 946.00	12 000	208	36	80	TRIPLE				
---	---	WFA12002CTW	4 019.00	WFA12002CW	WFA12002C24W	3 946.00	12 000/9000	240/208	36	80	TRIPLE				
---	---	WFA12003CTW	5 022.00	WFA12003CW	WFA12003C24W	4 949.00	12 000	347	36	80	TRIPLE				
---	---	WFA12006CTW	5 022.00	WFA12006CW	WFA12006C24W	4 949.00	12 000	600	36	80	TRIPLE				
---	---	WFA120083CTW*	4 019.00	WFA120083CW*	WFA120083C24W*	3 946.00	12 000	208	36	80	TRIPLE				
---	---	WFA120063CTW*	5 022.00	WFA120063CW*	WFA120063C24W*	4 949.00	12 000	600	36	80	TRIPLE				

Consult the optional colours chart or contact your Stelpro representative for all other colours.

* Three-phase unit

Models also available in 277 V and 480 V. --- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
WFAT1	built-in single pole thermostat [120 V-600 V] (standard or tamper-proof)	76.00
WFAT2	built-in double pole thermostat [120 V-600 V] (standard or tamper-proof)	96.00
WFASA1W	surface adapter (single unit)	157.00
WFASA2W	surface adapter (double unit)	319.00
WFASA3W	surface adapter (triple unit)	471.00
WFADIS-30*	disconnect switch kit 600 V/30 A, 2 poles	195.00
WFADIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles	231.00
WFADIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles	279.00
WFC24RX*	relay kit without transformer 24 V	204.00

* Factory installation

Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.




THROW DISTANCE AND HEAT RISE

UNITS	THROW DISTANCE		HEAT RISE	
	M	FT	°C	°F
1.5	4.1	13'7"	17	30
2	4.1	13'7"	22	40
3	4.1	13'7"	33	59
4	4.1	13'7"	44	79
4.8	4.1	13'7"	53	95
6	4.1	13'7"	33	59
8	4.1	13'7"	44	79
9	4.1	13'7"	33	59
12	4.1	13'7"	44	79


Stelpro reserves the right to modify at any time the description, manufacturing, or price of its products. Additionally, Stelpro may apply restocking fees or refuse a refund based on one or more of the following criteria: optional color, custom product, assembly with low-demand options. For the latest product information and prices regarding the products, please visit the website www.stelpro.com.

TECHNICAL DRAWINGS

SINGLE UNIT

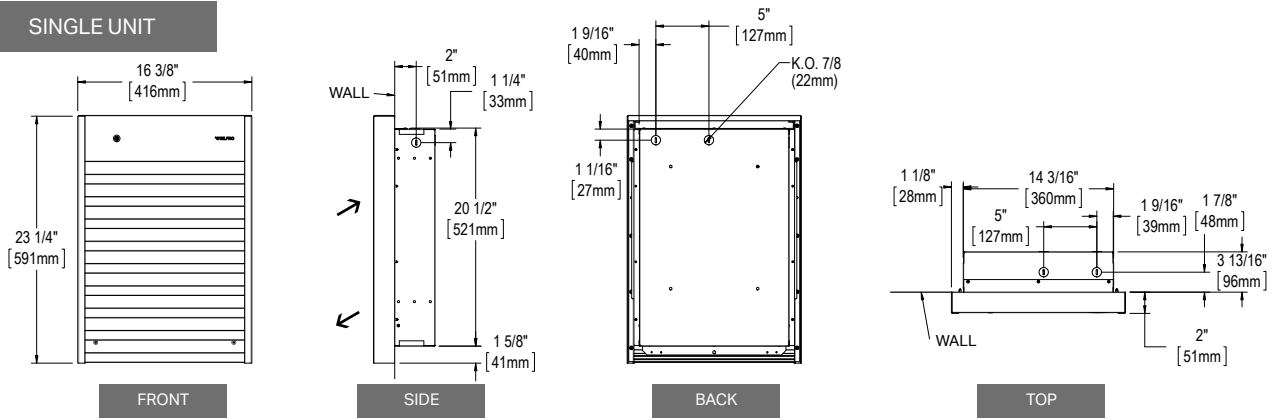

DOUBLE UNIT

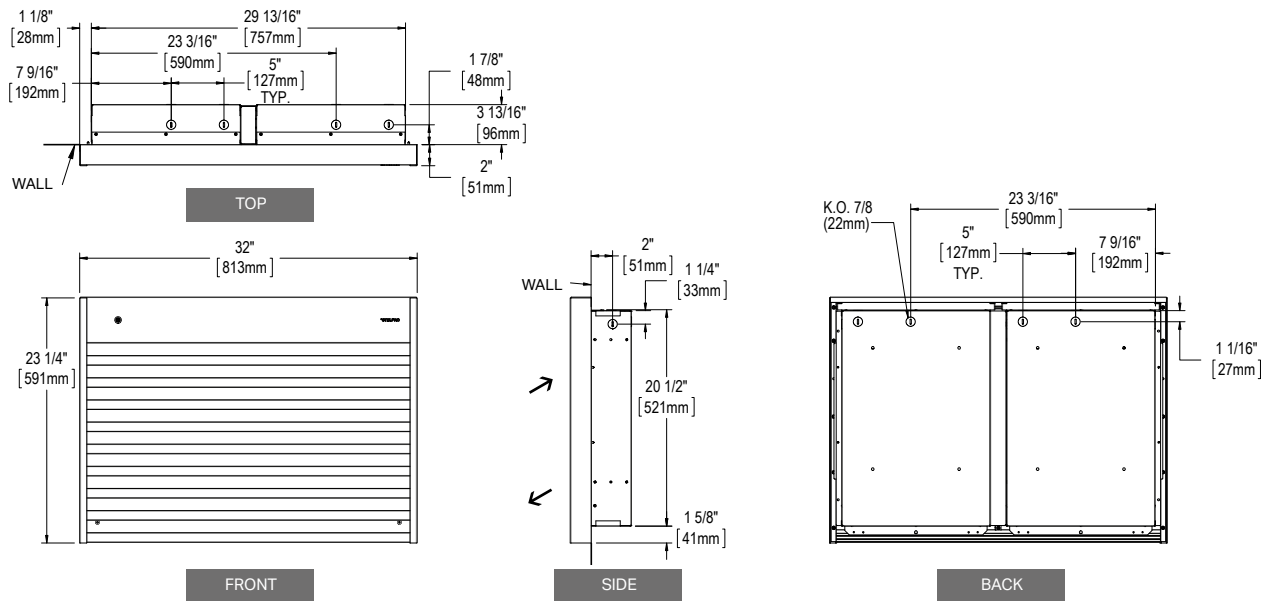

TRIPLE UNIT

