SA-LCD15
Digital Wall Control

TECHNICAL DATA SHEET

SA-LCD15[1]

DIGITAL WALL CONTROL

Decora type digital wall control for residential energy and heat recovery ventilators (ERV and HRV) with recirculation mode and humidity management.

[1] Offered in a boxed version (SA-LCD15-B) for in-store retail sales.



FEATURES

Designed for standard 2" x 3" electrical boxes.

Decora style wall plate included.

OPERATING MODES

- Economy - 20 minutes at low speed 40 minutes on standby.
- Continuous - at low speed or high speed
- Humidity - switches to high speed when ambient relative humidity exceeds the user set point.
- Recirculation - at low speed or high speed.
- OFF - does not operate until restarted by the user.

COMPATIBILITY

Compatible with energy and heat recovery ventilators (ERV and HRV) manufactured as of November 2024.

DIMENSIONS

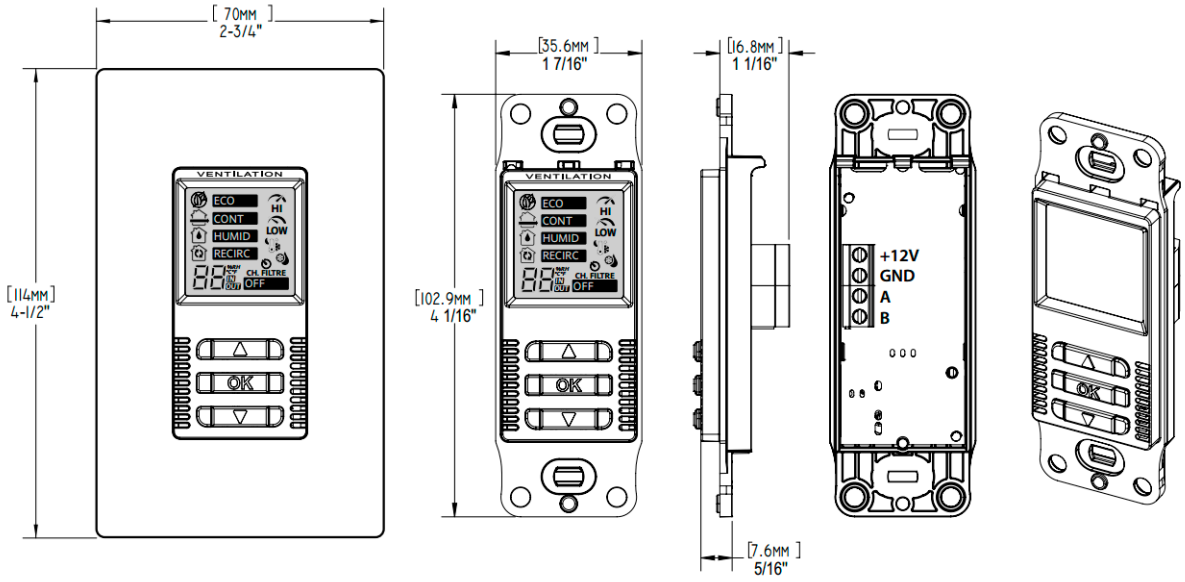

SUPPLIED WALL PLATE FRONT SIDE BACK

OUELLET	innovair		Global Commander	epurair	STELPRO
1 800 463-7043	1 800 567-2733	305 463-9998	1 800 463-7043	1 800 205-1108	1 800 363-3414 (Electricians) 1 866 766-6020 (Consumers)
ouellet.com	dettson.com	innovair.com	globalcommander.ca	epurair.com	stelpro.com