PYROBOX CONTROL PANELS FOR SNOW MELTING SYSTEMS



- THREE MODELS AVAILABLE
 FOR MAXIMUM COMPATIBILITY
 BASED ON REQUIRED VOLTAGE
- CABLE PASS-THROUGH HOLES UNDER THE PANEL
 MAKE INSTALLATION EASIER FOR THE ELECTRICIAN
- EASY TO OPERATE EASY TO USE AND PROGRAM CONTROLLER
- MULTI-ZONE CONTROL FIVE ZONES POSSIBLE THANKS TO SEQUENTIAL CONTROL
- COMPATIBLE WITH SIT-6E
 PAVER SENSOR



• grey

MANUFACTURING

- built-in adjustable GFCI
- IP20 enclosure protection for Indoor installation

APPLICATIONS

- driveways
- sidewalks
- loading docksstairs and pavement

CONTROL

- electronic with adjustable parameters for customized installations
- test mode to perform a quick system check
- a third-party terminal is available to connect a SIT-6E[™] sensor and control some or all zones
- sequencing zone option: enables larger snow melting area with reduced power consumption on site
- multiple snow sensor input (optional)
- energy efficient algorithm
- adjustable setpoints: upper and lower limit temperature, hold ON/OFF delay, manual ON and time splitting between zones

DIMENSIONS

- Pyrobox 3 and 3C 15x12x6 in. (380x300x155 mm)
- Pyrobox5
- 20x20x8 in. (500x500x200 mm)

WARRANTY

two years




TECHNICAL SPECIFICATIONS

PRODUCT	NUMBER OF CONTACTORS	POLES PER CONTACTOR	TOTAL AMPERAGE	MAXIMUM VOLTAGE	PRICE
CODE			AMPS	VOLTS	
PYROBOX3	4	2P	120	277	6 266.00
PYROBOX3C	3	2X3P + 1X2P	330	600	7 856.00
PYROBOX5	5	4X3P + 1X2P	600	600	8 635.00

FC_PYROBOX_EN_220623

°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.

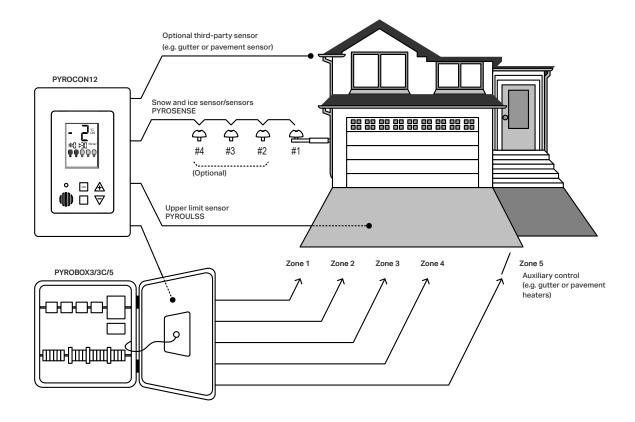



PYROSENSE

SNOW AND TEMPERATURE SENSOR

- 30-foot connection cable
- Shaped to avoid snow build-up
- Four spikes to keep birds away
- Easy to configure with the controller

PYROSB

RUSTPROOF METAL SUPPORT DESIGNED FOR THE PYROSENSE SENSOR

- Adjustable length (up to 24 inches)
- Holes on the side to secure the PYROSENSE cable with cable ties



PYROULS

TEMPERATURE SENSOR

- Measures ground temperature to prevent the cable from heating if the ground is already
 warm
- 30 feet in length

	ACCESSORIES	
PRODUCT	DESCRIPTION	PRICE
PYROSENSE	electronic snow and ice sensor for PYROBOX with 30 ft wire	909.00
PYROSB	PYROSB wall-mounted adjustable metal bracket for the PYROSENSE	
PYROULS	30 ft upper limit temperature sensor for PYROBOX	196.00

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-colour products. For all the latest models and prices, please refer to our website at www.stelpro.com.