

ASIRH | ZENITH™

INFRARED RADIANT HEATER



ZENITH™



COMFORTABLY RADIANT!

Warm up your summer nights and autumn days with our Zenith infrared radiant heater. It's perfect for terraces, outdoor waiting areas, arenas and spas. It can even be used in hard-to-heat areas such as factories. With its 14-gauge aluminum cabinet and stainless steel grille, the Zenith is lightweight yet rugged. Now, you can create your own comfortable environment, any time of the year.

- **GENERATES INSTANT HEAT**
- **COMPACT, LIGHTWEIGHT, STURDY AND EASY TO INSTALL**
- **CLEAN ELECTRICAL ENERGY WITH NO AIR DISPLACEMENT**
- **WEATHER-RESISTANT MODELS AVAILABLE**

COLOR

- black

FINISH

- super-resistant polyester powdercoat

MANUFACTURING

- 14-gauge aluminum housing
- stainless steel grille
- specialized embossed aluminum reflectors that optimize radiant efficiency and reduce glare
- standard mounting bracket (included)

LAMP

- quartz lamp with glare-reducing filter and tungsten filament produces short-wave infrared heat
- 80% radiant efficiency

CONTROL

- electronic dimmer with timer (optional) (ASIRHC402-1 or independent switch*)

INSTALLATION

- on wall or ceiling with mounting bracket (included) or pole mounted (adaptor not provided), in accordance with clearances and installation heights as specified in the installation manual

WARRANTY

- three years

* The power feeding the units can be reduced using controls that meet the following requirements: the controls must be able to handle inductive and resistant loads. They must also have circuits to regulate the start-up current since this type of appliance generates a high start-up current.

IDEAL FOR:

terrace, warehouse, factory, outdoor waiting area, spa

FOR MAXIMUM EFFICIENCY

ELECTRONIC DIMMER WITH TIMER (OPTIONAL)
SIRHC402-1



°STELPRO

Stelpro reserves the right to modify descriptions, manufacturing specifications or prices without prior notice. No returns accepted on optional-color products. For all the latest models and prices, please refer to our website at www.stelpro.com.



FC_SIRH_US_150623

TECHNICAL SPECIFICATIONS




| PRODUCT | WEATHER-RESISTANT | POWER | | VOLTAGE | FREQUENCY | LENGTH | HEIGHT | DEPTH | WEIGHT |
|------------|-------------------|-----------|---------------|---------|-----------|--------|----------|-------|--------|
| CODE | CODE | WATTS | BTU/H | VOLTS | HZ | IN. | IN. | IN. | LB |
| ASIRH1501W | ASIRH1501WR | 1500 | 5120 | 120 | 60 | 19 | 10 | 5 5/8 | 11 |
| ASIRH2002W | ASIRH2002WR | 2000/1600 | 6825/5460 | 240/208 | 60 | 19 | 10 | 5 5/8 | 11 |
| ASIRH4002W | ASIRH4002WR | 4000/3200 | 13 651/10 921 | 240/208 | 60 | 19 | 15 7/8 | 5 5/8 | 13.8 |
| ASIRH6002W | ASIRH6002WR | 6000/4800 | 20 476/16 381 | 240/208 | 60 | 19 | 21 13/16 | 5 5/8 | 16.3 |

ACCESSORIES




| PRODUCT | DESCRIPTION |
|---------------|---|
| KIT-ESIRH151 | infrared replacement element 1500 W @ 120 V |
| KIT-ESIRH202 | infrared replacement element 2000 W/1600 W @ 240 V/208 V |
| KIT-SIRH-SUP1 | expandable support from 20 in. to 34 in. – 508 mm to 864 mm |
| SIRHC402-1 | electronic dimmer with timer (silver), 4000 W/3300 W/2000 W @ 240 V/208 V/120 V max |

TECHNICAL DRAWINGS

1500 W AND 2000 W MODELS

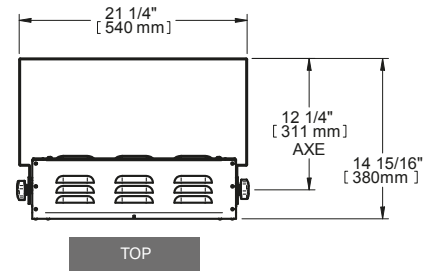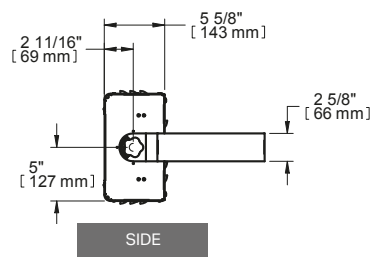

4000 W MODEL

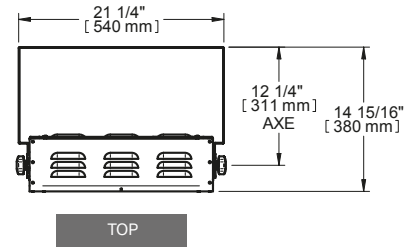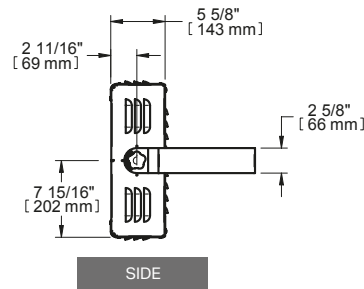

4180 W AND 6000 W MODELS

